


QUOTATION

To : **PT. PANCARAN LOGISTIK INDONESIA**
Raya Margomulyo 44 Komplek Pergudangan Suri Mulya Blok K 16
Kel. Tambaksarioso Kec. Asem Rowo, Surabaya
Attention: Bpk. Sanjaya/ Bpk. Wahyu (0889-99805548)

Project : Roof Heat Insulation Coating
Location : Warehouse SIEMENS
: KIMA - Makassar
: Indonesia

NO	DESCRIPTION	QTY	UNIT	SERVICES/ MATERIAL COST (IDR)					REMARKS
				SERVICES/ UNIT	AMOUNT	MATERIAL/ UNIT	AMOUNT	TOTAL	
I	PREPARATION								
I.1	Mobilization/ Demobilization	2	vv	1.500.000	3.000.000			3.000.000	
I.2	Local Transport (Mess - Site)	1	ls	5.000.000	5.000.000			5.000.000	
I.3	HSE - PPE- Insurance (Workmen)	1	ls	7.500.000	7.500.000	2.500.000	2.500.000	10.000.000	
I.4	Safety Work Area (Roof top)	1	ls	6.000.000	6.000.000	8.000.000	8.000.000	14.000.000	
I.5	Accomodation	1	ls	3.500.000	3.500.000			3.500.000	
I.6	Scaffolding Rent	1	ls	3.000.000	3.000.000	18.000.000	18.000.000	21.000.000	
I.7	Scaffolder (Certified)	3	ls	7.500.000	22.500.000			22.500.000	incl. accomodation
II	WORK SERVICES								
II.1	Work Preparation	1	ls	2.500.000	2.500.000	5.000.000	5.000.000	7.500.000	
II.2	Coating Insulation								
	Propan HPR-980	757	m	42.000	31.794.000	63.408	48.000.000	79.794.000	2 layers, DFT 300 micron
TOTAL				Services	84.794.000	Material	81.500.000	166.294.000	

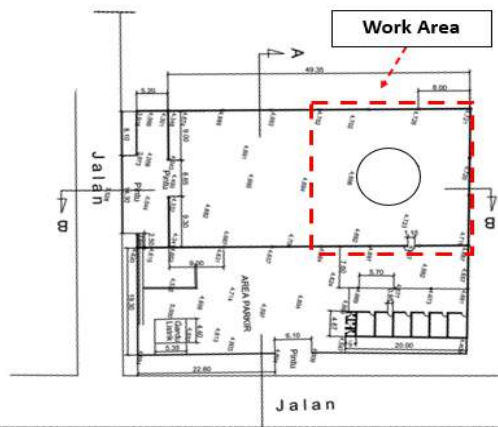

ROOF AREA - MATERIAL CALCULATION

AREA COVERAGE (50%)

1. Roof Top (Half Roof Painting)	25 m	x	25 m	=	625	m2
2. Corrugation factor	1,1	x	625 m	=	688	m2
3. Reserves	10%	x	688 m	=	69	m2

TOTAL Area (pembulatan) 757 m2

MATERIAL REQUIREMENT

1. Heatproof HPR-980 (Propan)	1 drum	=	20	litre	
	1 lt	=	2	m2	--> 2 layers --> 300 µ DFT
	1 m	=	0,5	litre	
	757 m2	x	0,5	litre	= 379 litre
					Touch-up = 4 litre
					Total = 383 litre

Requirement

20 Drum
- litre

* Terms and conditions:

- Price Excludes 11% VAT/ PPN
- This Offer Price is valid for 14 (fourteen) Days
- All permits are made by the COMPANY/ USER
- Excluding local coordination costs, social, etc.
- If there are additions or changes to the work, it can be discussed later
- Prices are subject to change at any time
- Determination of the work plan point can be done by COMPANY/ USER or recommendations from the consultant
- Not including the cost of rapid test or swab test PCR (if any)
- If there is a delay/waiting time during work (permits, social, etc.) a fee of IDR 1,000,000 will be charged per day
- For the purchase of Materials, it can be done by the COMPANY/ USER or by the Consultant
- The price of Materials/ Goods can change at any time and be communicated to the COMPANY/ USER
- Payment for the Purchase of Materials is paid 100% H-3 before the purchase or ordering period of goods
- Payment Terms for Services will be 2 (two) termijn as follow:
12.1 Termijn I: Downpayment 50% (fifty percent) H-3 before personnil and equipment to work area/ site/
12.2 Termijn II: Full Payment 50% (Fifty percent) after work finished and approved by the COMPANY

Bandung, 04 October 2025

Andy Nugraha S.